



Delay-line based nanosecond adiabatic spin-dependent kicks on a hyperfine manifold

Liyang Qiu¹, Jiangyong Hu¹ and Saijun Wu¹

¹Department of Physics, State Key Laboratory of Surface Physics and Key Laboratory of Micro and Nano Photonic Structures (Ministry of Education), Fudan University, Shanghai 200433, China.

➤ Motivations

Ultra-precise control of spinor matterwave is instrumental to atom interferometry and other ultra-cold experiments for achieving quantum enhanced performances. Traditionally, precise Raman control requires the differential light shifts to be nullified at proper sideband intensity ratios [1], at the expense of significant spontaneous emission. On the other hand, the THz-level "magically detuned" Spin-dependent kicks (SDK) for ion traps [2-3] is too power-demanding for large samples.

Here, we propose and demonstrate an adiabatic SDK technique, operated in an intermediate regime of detuning, for achieving deeply subwavelength-resolved spinor phase gates in a laser power-efficient manner. We show in presence of the multi-level couplings in such regime, the coherent spin leakage and Stark shifts can nevertheless be well-controlled. Experimentally, we break the detuning-dependent SDK speed barrier by spatially resolving nanosecond Raman pulses on an optical delay line, for the first time [4].

➤ Adiabatic SDK on a Hyperfine Manifold

• SDKs on a hyperfine manifold

$$H(\mathbf{r}, t) = \sum_{m=-F_b}^{F_b} H_0^{(m)}(\mathbf{r}, t) + H'(\mathbf{r}, t)$$

$$H_0^{(m)}(\mathbf{r}, t) = \hbar \left(\frac{\delta_0}{2} \sigma_z^{(m)} + \frac{\Omega_R^{(m)}}{2} e^{i\mathbf{k}_R \cdot \mathbf{r}} \sigma_+^{(m)} + h.c. \right)$$

• f_{SDK} and ϵ_{leak} for non-ideal SDK


$$f_{\text{SDK}} = \left\langle \left| \langle c_m | U_K^+(\mathbf{k}_R) \mathcal{U}(\mathbf{k}_R; \eta) | c_m \rangle \right|^2 \right\rangle_{\eta, c_m}$$

$$\epsilon_{\text{leak}} = \epsilon_{\text{sp}} + \epsilon_{\Delta m}$$

1) Spontaneous emission


2) Coherent leakage ($\Delta m = \pm 2$)

$$\epsilon_{\Delta m} \propto \frac{\omega_{\text{hfs},e}^2}{\Delta_e^2}, \quad \Omega^{\pm 2} = O\left(\frac{\omega_{\text{hfs},e}}{\Delta_e}\right) \Omega_R$$

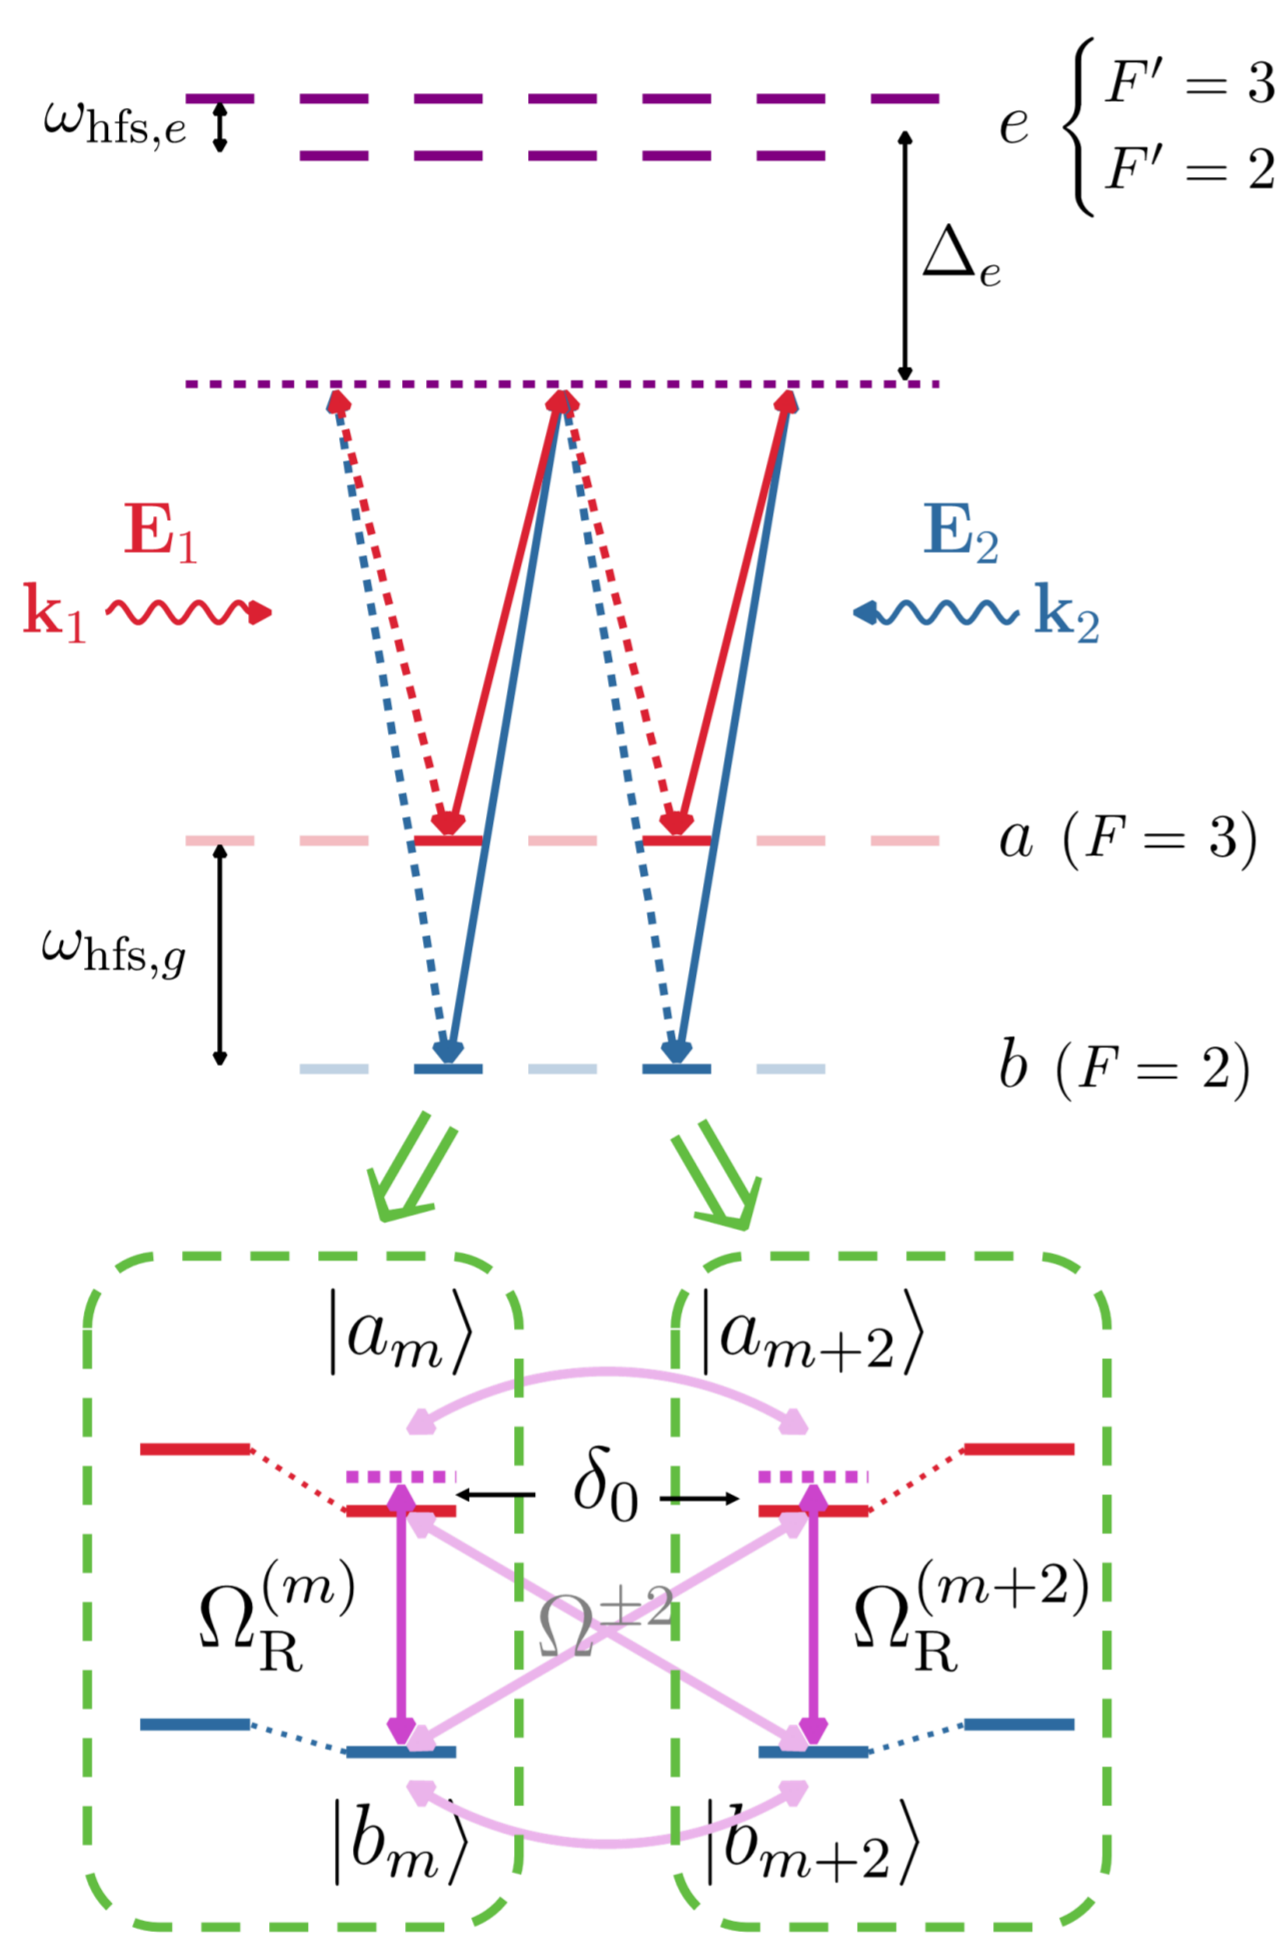


➤ Delay-line Based Nanosecond SDKs

• D1 line quantum control pulse generation setup

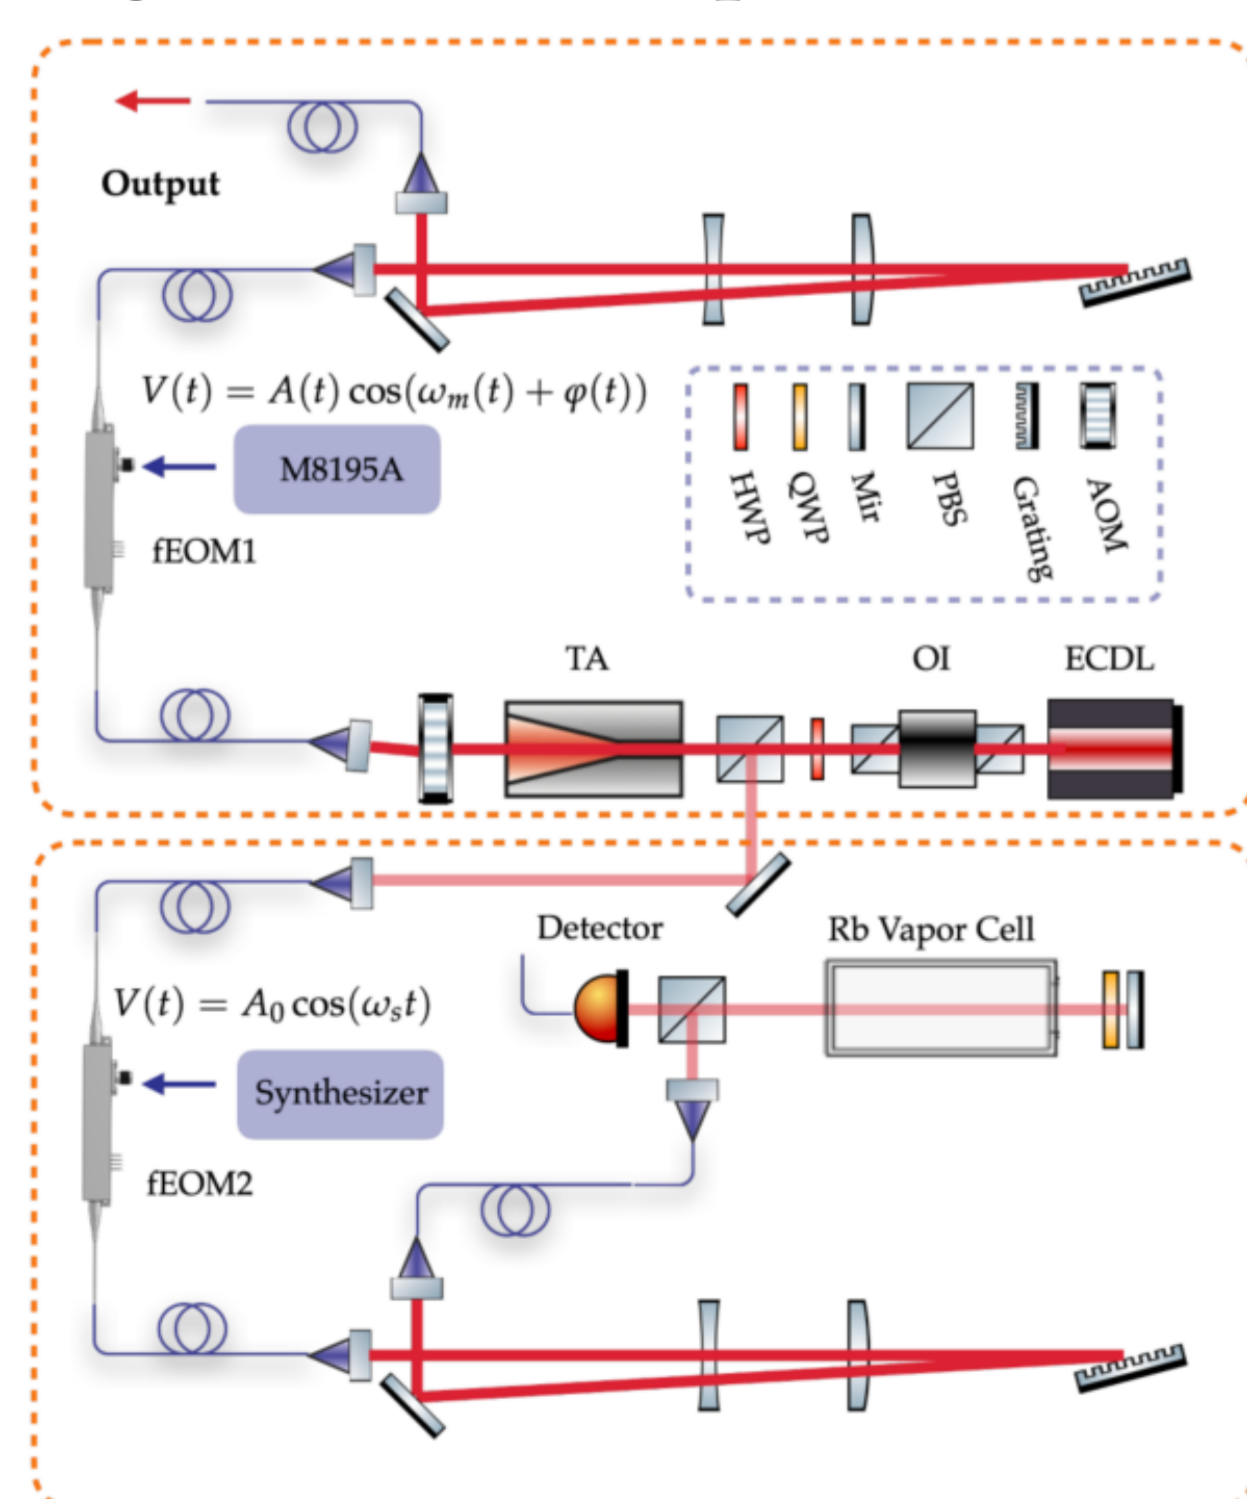

• Nanosecond SDKs on an optical delay line

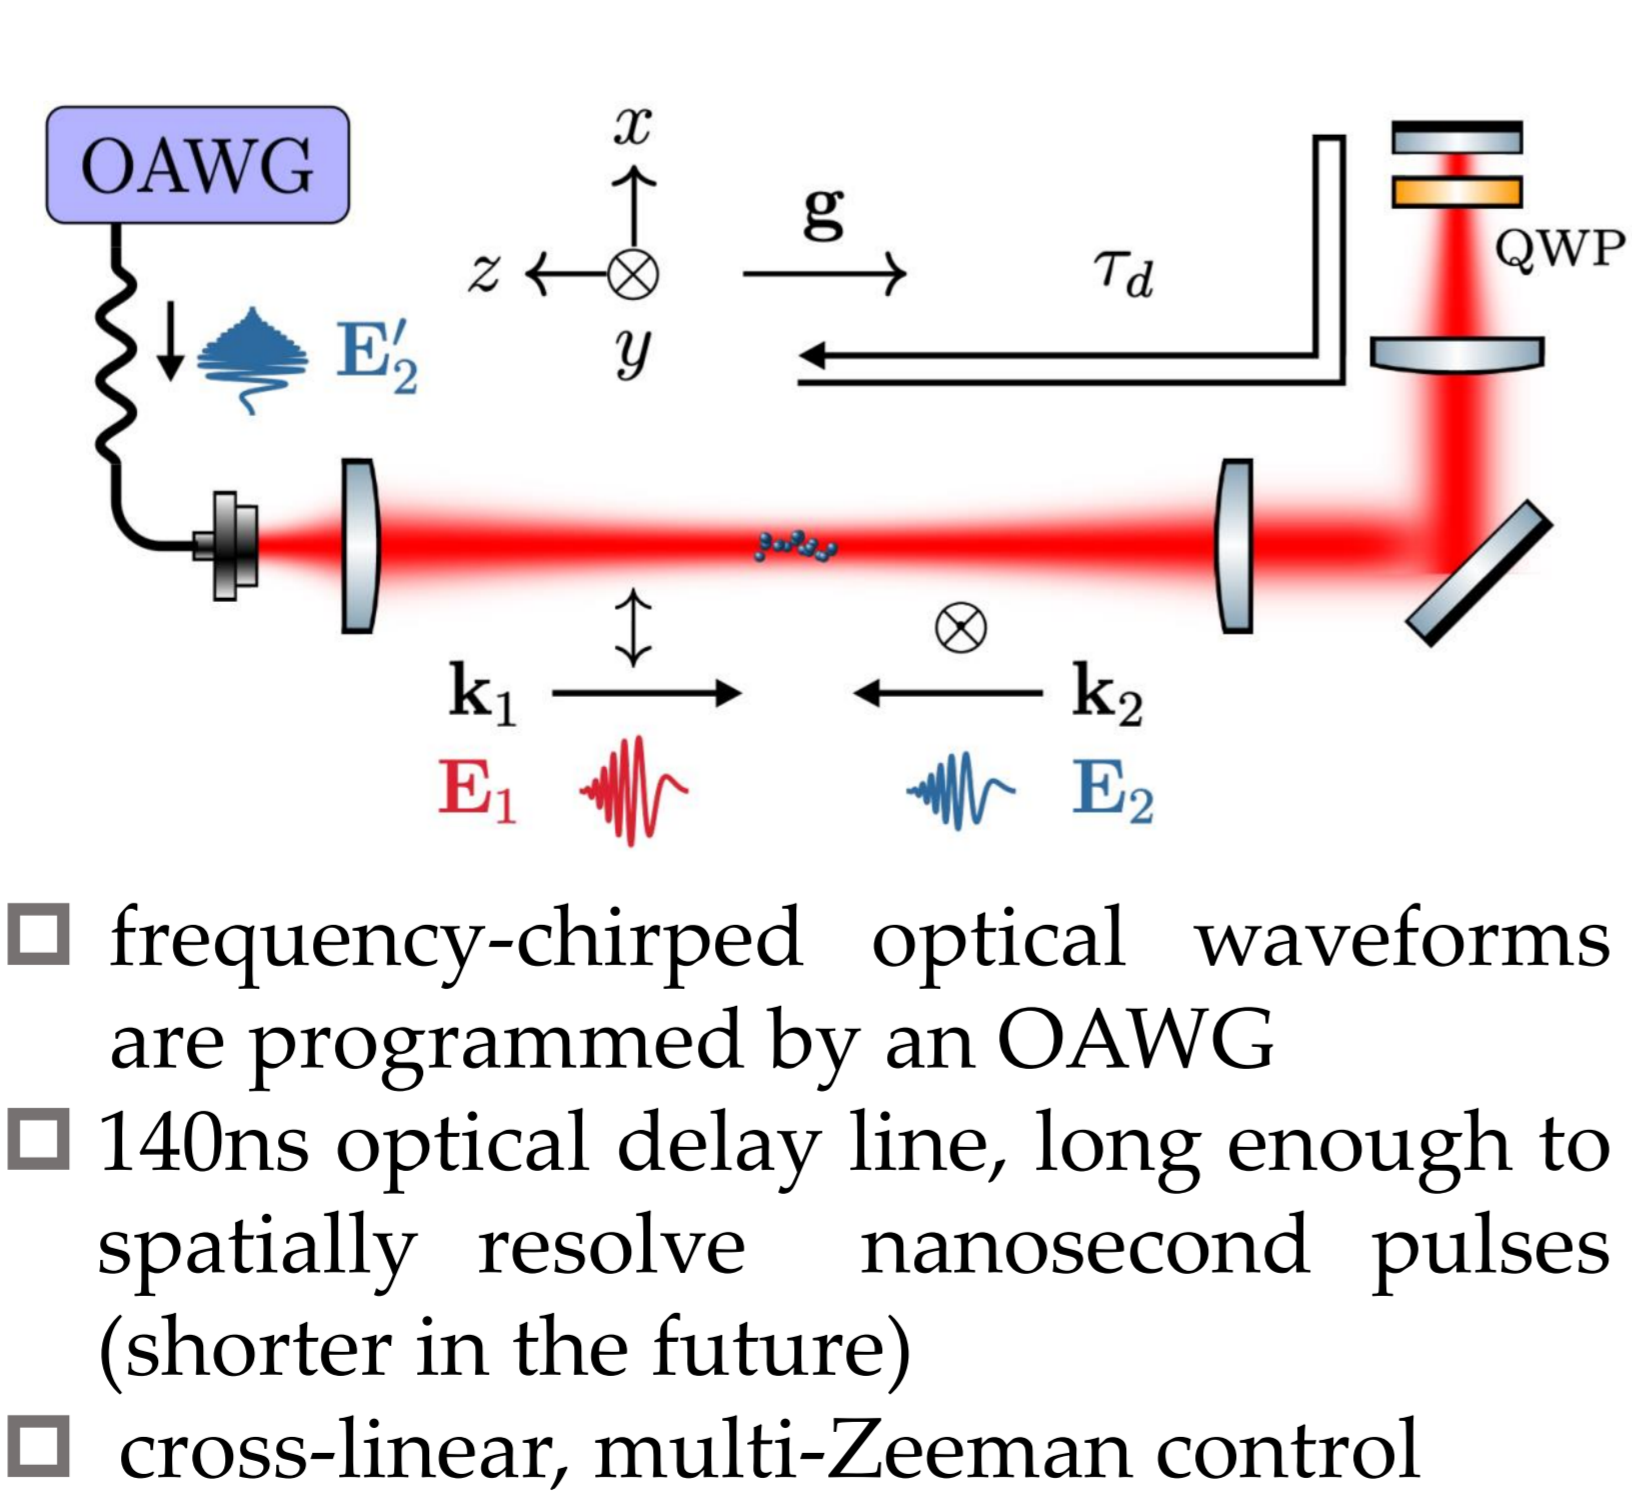

➤ Conclusion

We extend the Raman adiabatic SDK technique into the nanosecond regime. Counter-propagating frequency-chirped laser pulses are programmed on an optical delay line to parallelly drive five $\Delta m=0$ hyperfine Raman transition of ⁸⁵Rb atoms within $\tau=40$ ns. An average SDK fidelity of $f_{\text{SDK}} \approx 97.6\%$ is inferred from spin-dependent momentum transfer and Raman population measurements, combined with precise numerical modeling.



lyqiu16@fudan.edu.cn, jyhu20@fudan.edu.cn, saijunwu@fudan.edu.cn

➤ Pulse Sequence

• Adiabatic rapid passage (ARP)


$$\begin{cases} \Omega_R(t) = C_R^{(0)} \sin(\pi t / \tau_c) \\ \delta_R^b(t) = \delta_{\text{swp}} \cos(\pi t / \tau_c) \end{cases}$$

• Chirp-alternating adiabatic SDKs

1) Positive and negative chirped pulse


$$\begin{cases} \delta_{R,u}^b(t) = \delta_{\text{swp}} \cos(\pi t / \tau) \\ \delta_{R,d}^b(t) = -\delta_{\text{swp}} \cos(\pi t / \tau) \end{cases}$$

$$2) \mathcal{U}_{\text{oddu}}^{(4N)}(\mathbf{k}_R) = \mathcal{U}_u^{(0)}(\mathbf{k}_R) \mathcal{U}_d^{(0)}(-\mathbf{k}_R) \mathcal{U}_d^{(0)}(\mathbf{k}_R) \mathcal{U}_u^{(0)}(-\mathbf{k}_R)$$

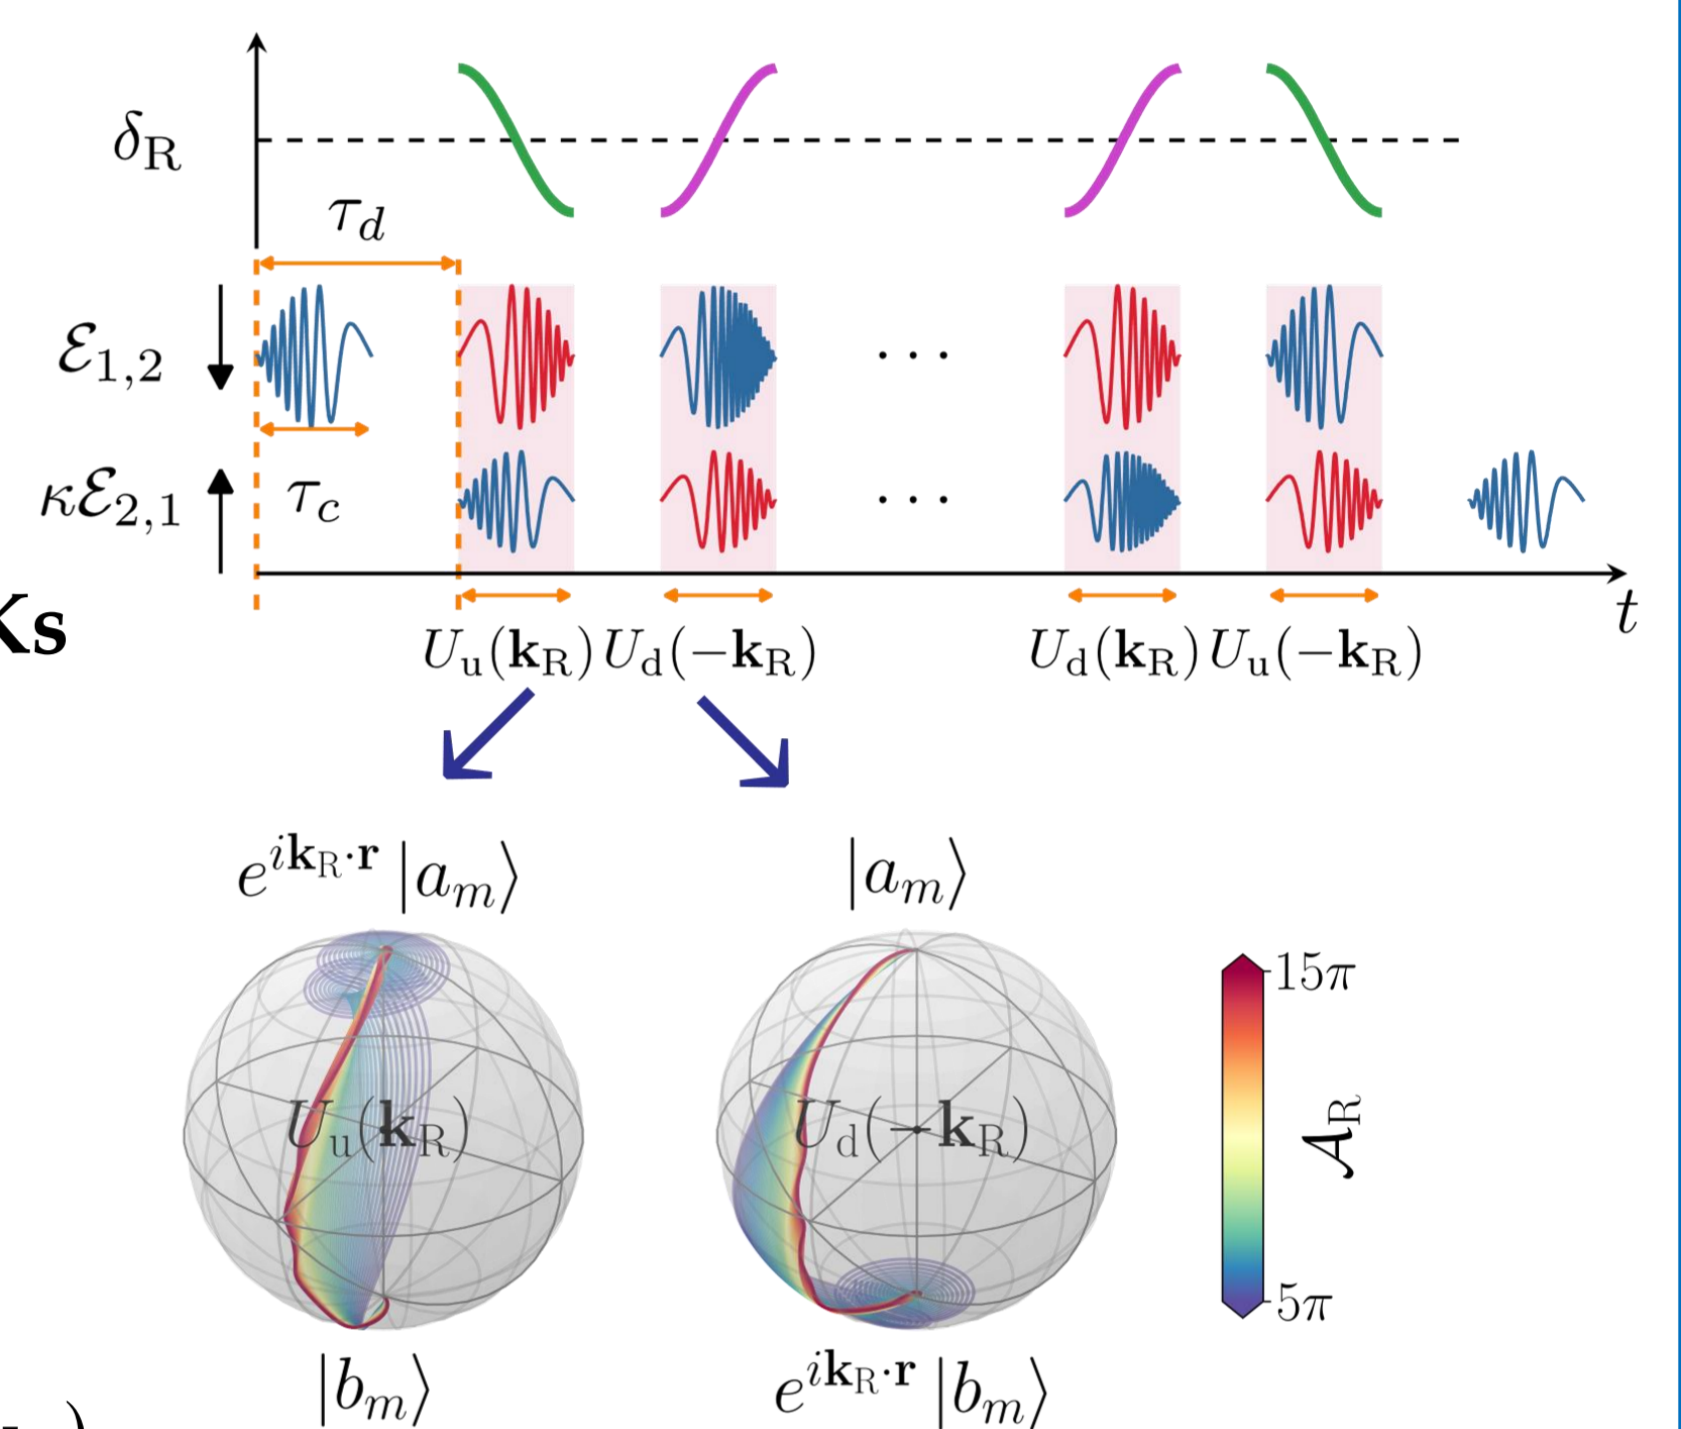


➤ Experimental Results

• Momentum transfer measurement

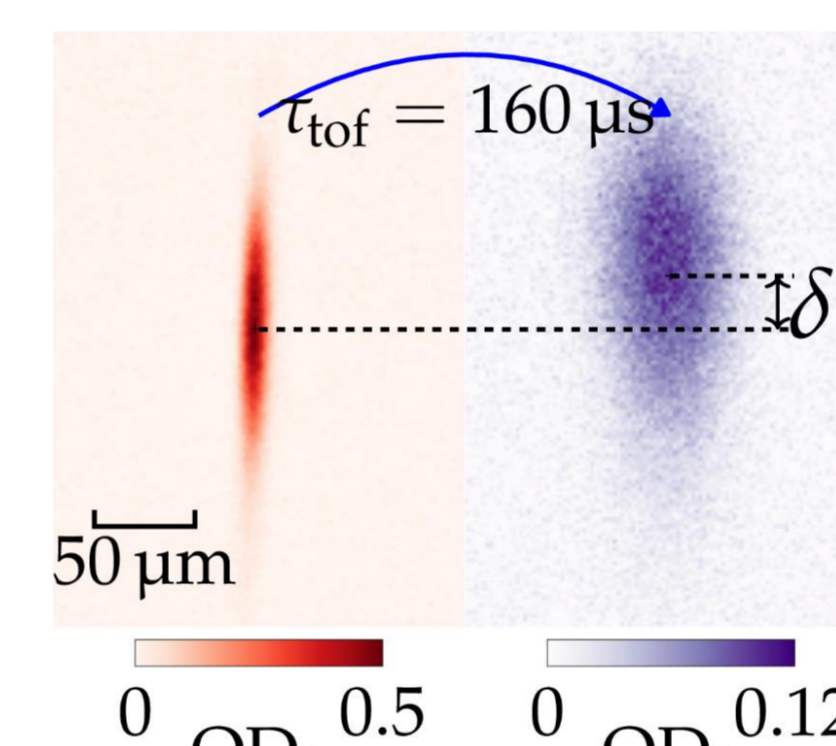


Δ_z : the center-of-mass position shift

• Inference of f_{SDK}

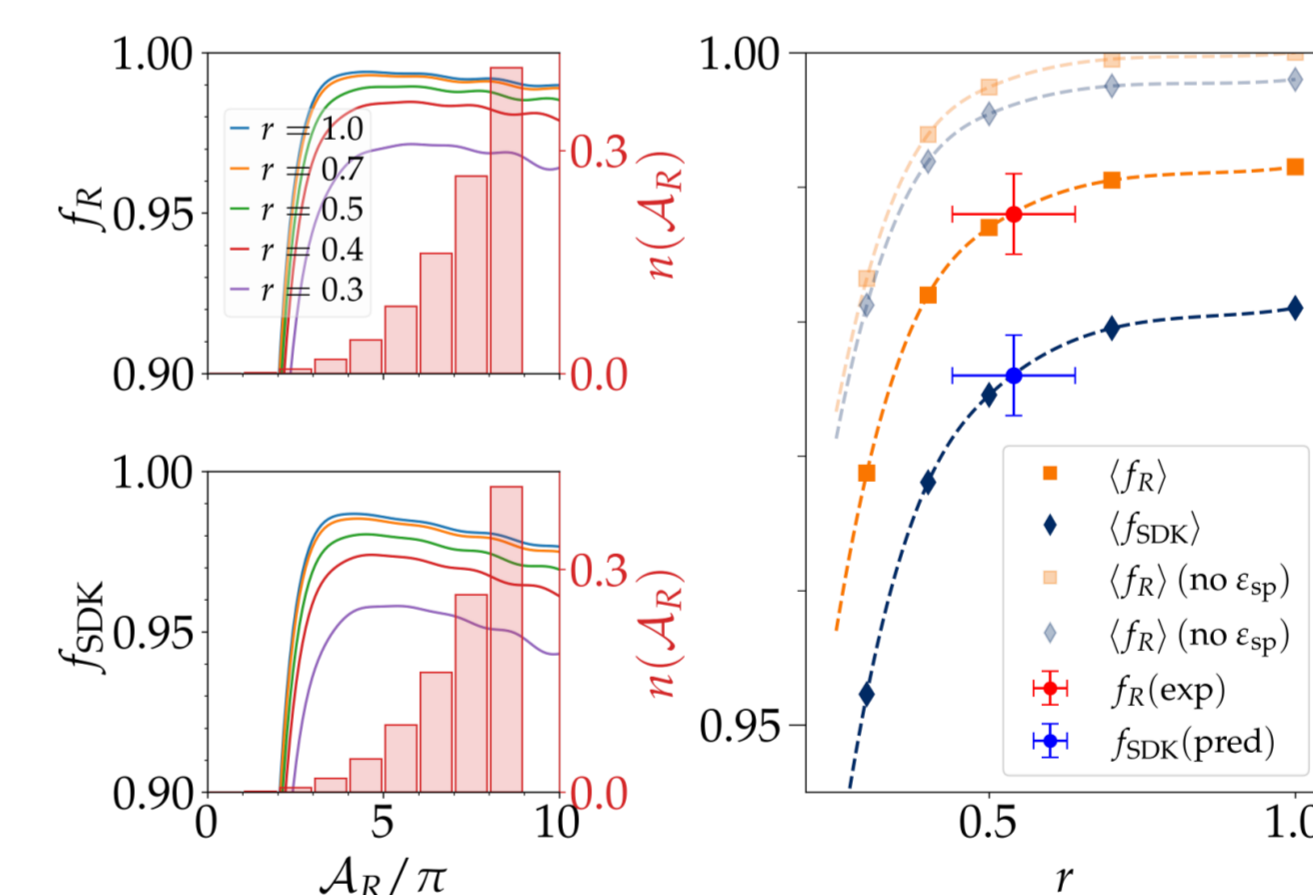


Raman transfer efficiency $f_R \approx 98.8\%$

• Optimizing adiabatic SDK

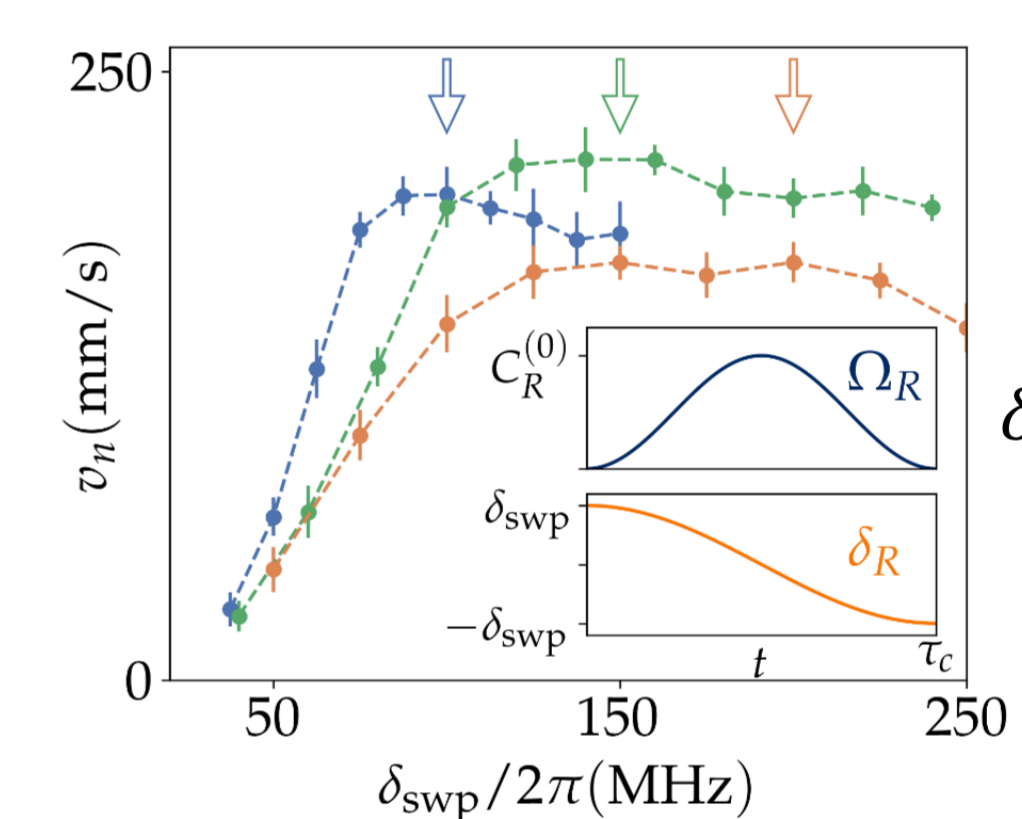


Optimizing \mathcal{V}_n by sweeping δ_{swp} in different pulse area

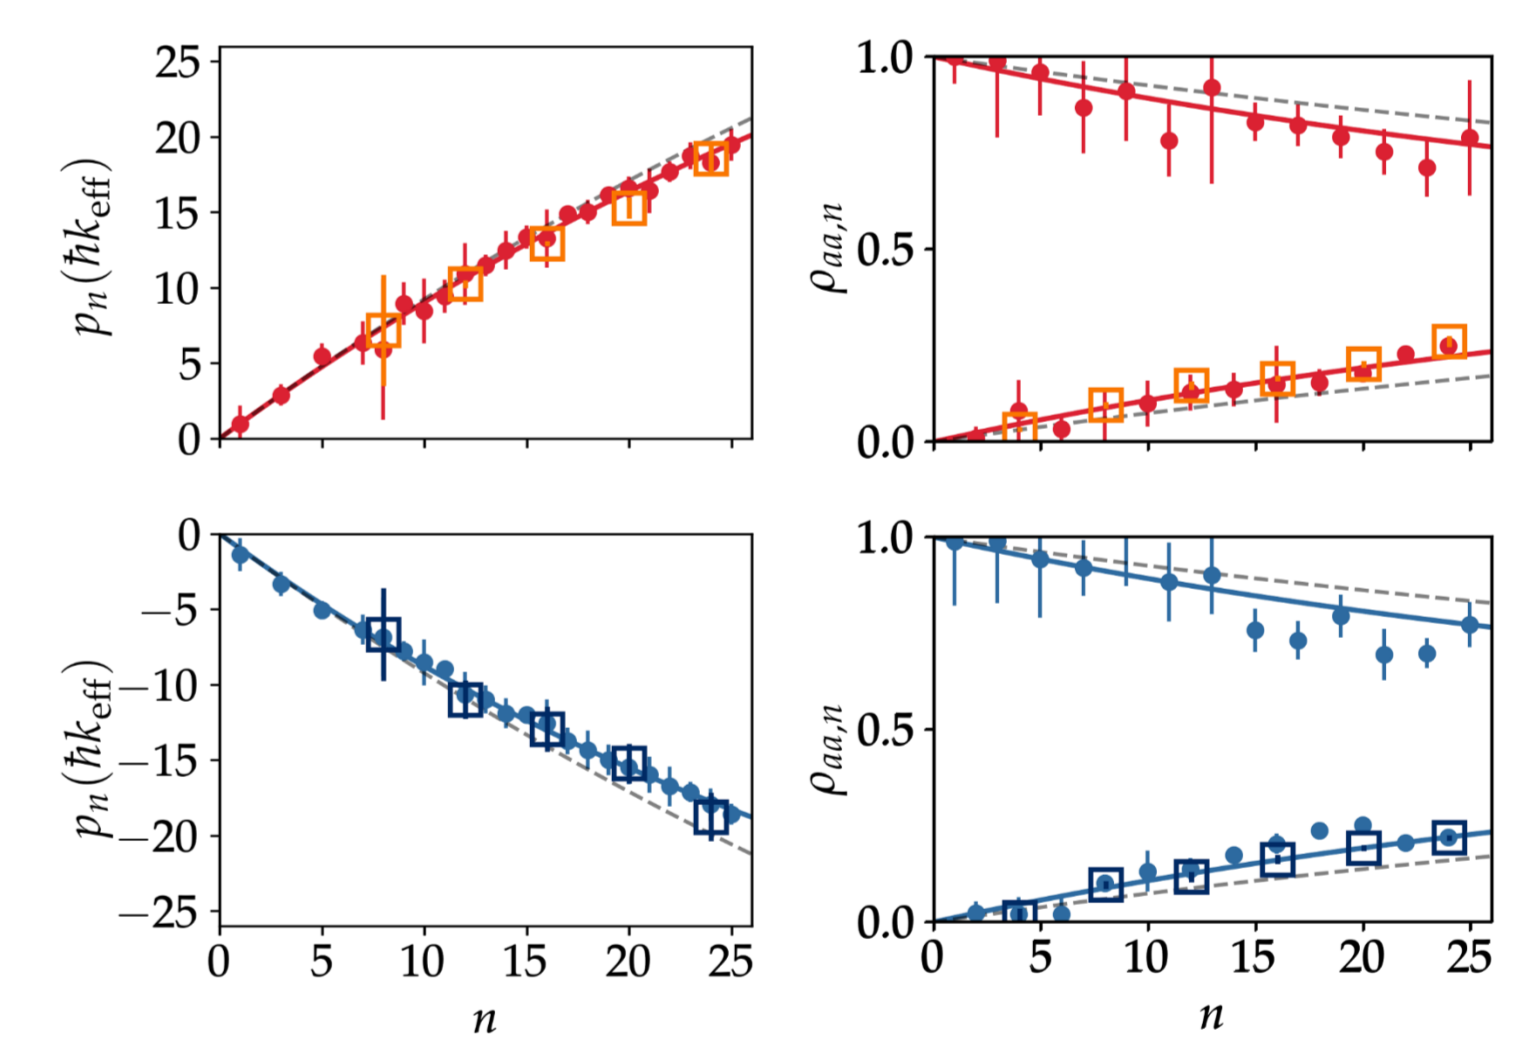


$f_{\text{SDK}} \approx 97.6(3)\%$

➤ Geometric Spinor Matterwave Control


• Spin leakage for non-ideal double-SDK

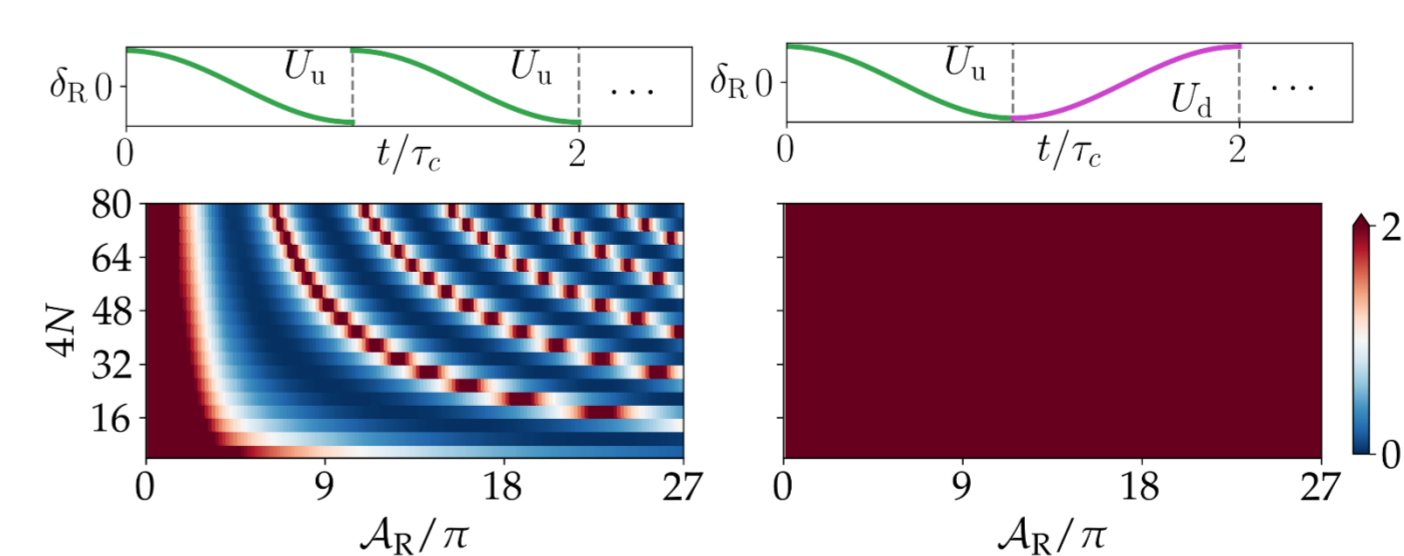

• Robust cancellation of dynamic phase

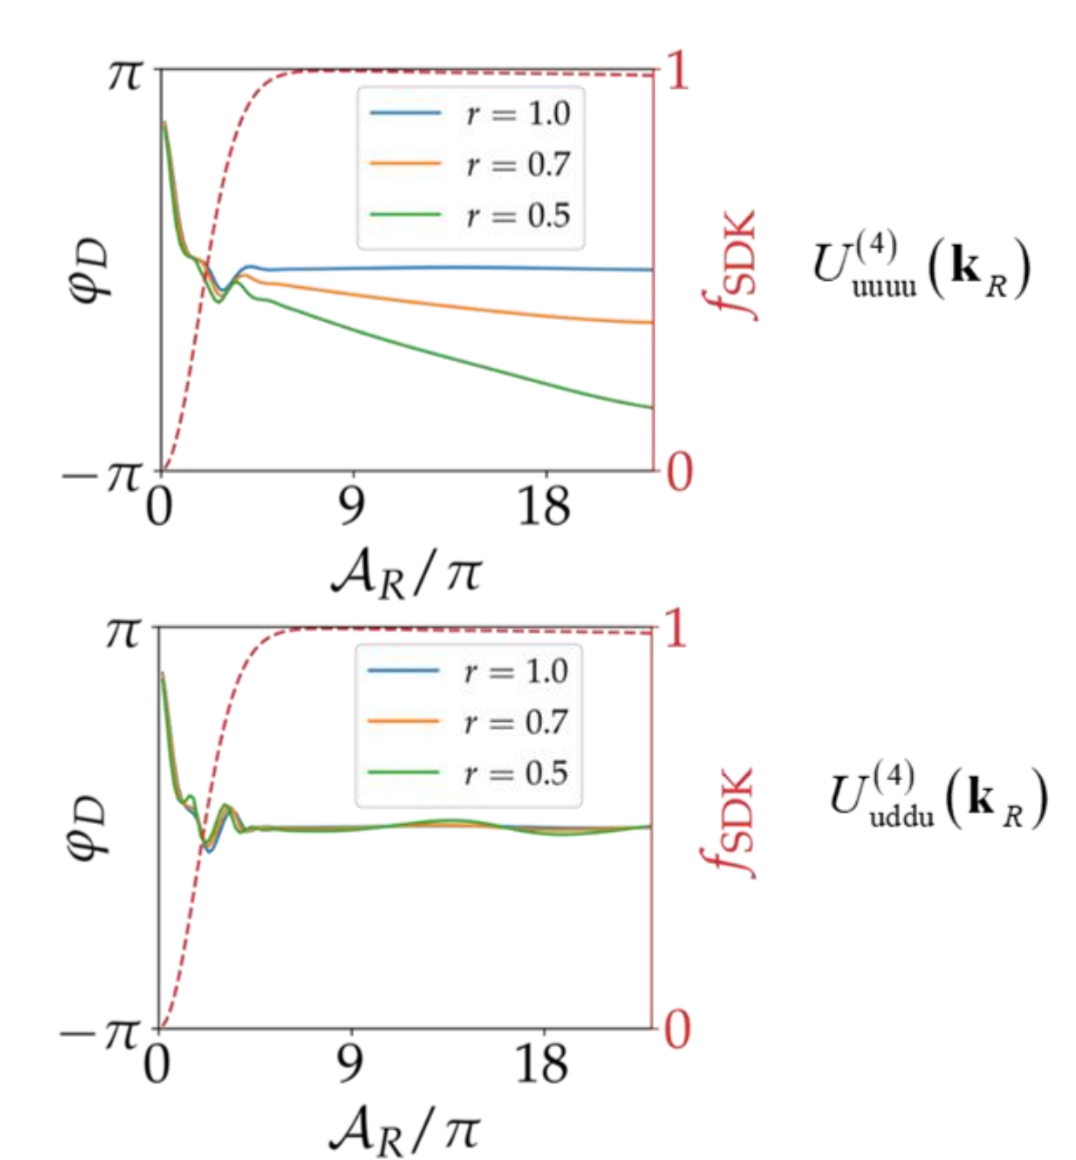

• Phase gate infidelity

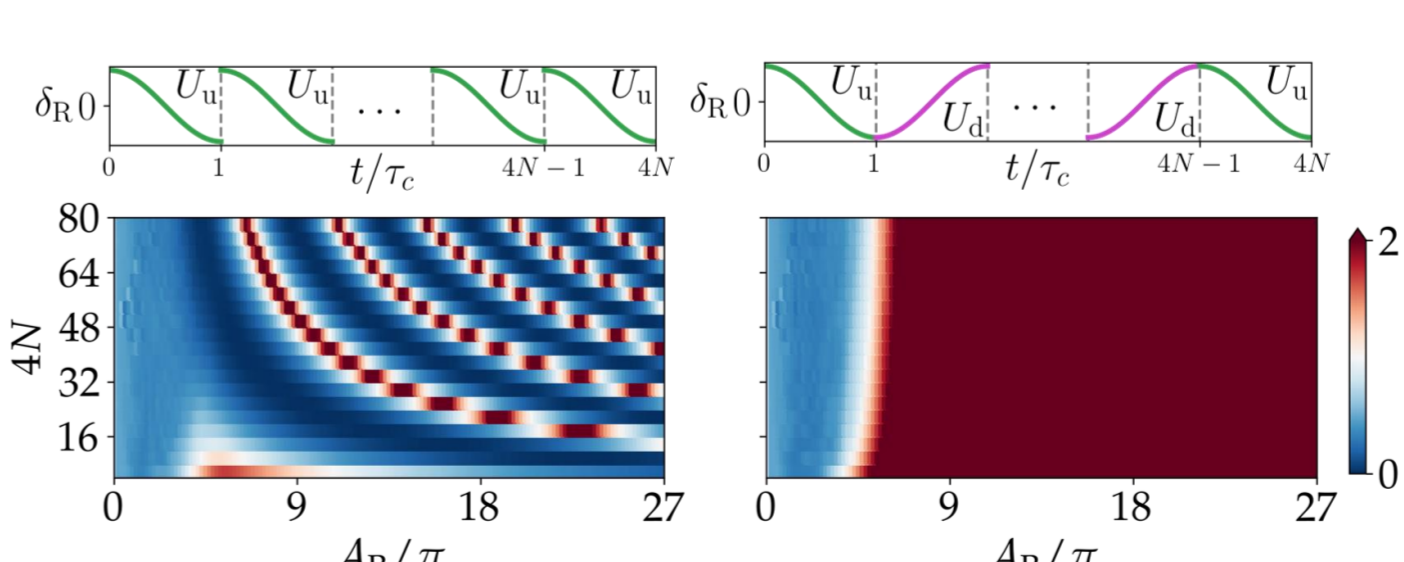

➤ Reference

1. Kasevich, M. & Chu, S. Appl Phys B 54, 321–332 (1992).
2. Mizrahi, J. et al. Phys Rev Lett 110, 203001 (2013).
3. Barrett, M. D. et al. Aip Conf Proc 770, 350–358 (2005).
4. Qiu, L. et al. Arxiv (2022).

Please visit our group website (ultracontrol.fudan.edu.cn) for an introduction to various projects. To discuss studentship and job opportunities, or just for visiting, please contact saijunwu@fudan.edu.cn.